



L2225604

Faro di profondità alogeno con attacco al pulpito

Costruito in ABS con staffa in alluminio anodizzato e base in acciaio inox. Bulbo ottico Wagner con portata max di 600 mt. Bulbo a doppio filamento. Luce corta a largo fascio 100 mt. Snodo totale con regolazione in altezza e in rotazione 360°, entrambi frizionabili. Faro sfilabile dal basamento con cavo estensibile fino a 2 mt. Interruttore speciale a tenuta stagna con cappuccio in gomma incorporato nella calotta posteriore. Inalterabilità agli agenti atmosferici. Inalterabilità del bulbo ottico che, essendo sotto vuoto, non patisce né l'umidità, né il salino. Grande potenza e leggerezza.


Halogen high-beam light fitted with pulpit coupling

Manufactured in ABS with anodized aluminium bracket and stainless steel base. Wagner optical bulb with 600 mt. max. capacity. Short light with 100 mt. wide beam. Full 360° rotation and elevation joint, frictioning. Detachable light with 2 mt. extension cable. Special waterproof switch, fitted with rubber cover, built-in into the rear dome. Equipped with waterproof plug for flush or flat mounting. Weather resistant. Vacuum-sealed unbreakable optic bulb, humidity and salt resistant. Great power and light weight.

Articolo-Item	€/pc.	Volts	Watt	Luce di profondità Depth light mt.	Per tubi For pipes mm.	Preso Socket	Lampadina ricambio Spare bulb	kg.
L 22 25 022		12	100 +100	600	22/25	Bipolare Plug connection	L2212000	1,240
L 22 25 604		12	100 +100	600	22/25	Accendisigari Cigarette plug	L2212000	1,240



L2225022



COMPLETO DI-COMLETE WITH

Art. L2212000
(pag. 214)Art. N2120150
(pag. 214)

SUGGESTED ITEM



Art. L0636048

Art. L0601331



L2201604

Faro di profondità alogeno con attacco al piano

Costruito in ABS con staffa in alluminio anodizzato e base in acciaio inox. Bulbo ottico Wagner con portata max di 600 mt. Bulbo a doppio filamento. Luce corta a largo fascio 100 mt. Snodo totale con regolazione in altezza e in rotazione 360°, entrambi frizionabili. Faro sfilabile dal basamento con cavo estensibile fino a 2 mt. Interruttore speciale a tenuta stagna con cappuccio in gomma incorporato nella calotta posteriore. Inalterabilità agli agenti atmosferici. Inalterabilità del bulbo ottico che, essendo sotto vuoto, non patisce né l'umidità, né il salino. Grande potenza e leggerezza.


Halogen high-beam light flat-mounting

Manufactured in ABS with anodized aluminium bracket and stainless steel base. Wagner optical bulb with 600 mt. max. capacity. Short light with 100 mt. wide beam. Full 360° rotation and elevation joint, frictioning. Detachable light with 2 mt. extension cable. Special waterproof switch, fitted with rubber cover, built-in into the rear dome. Equipped with waterproof plug for flush or flat mounting. Weather resistant. Vacuum-sealed unbreakable optic bulb, humidity and salt resistant. Great power and light weight.

Articolo-Item	€/pc.	Volts	Watt	Luce di profondità Depth light mt.	Basetta-Base Ø mm.	Preso Socket	Lampadina ricambio Spare bulb	kg.
L 22 12 022		12	100 +100	600	65	Bipolare Plug connection	L2212000	1,230
L 22 01 604		12	100 +100	600	65	Accendisigari Cigarette plug	L2212000	1,230



L2212022

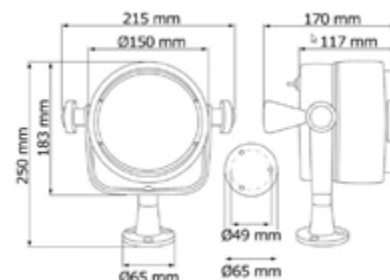

COMPLETO DI-COMLETE WITH

Art. L2212000
(pag. 214)Art. L2200022
(pag. 214)

SUGGESTED ITEM



Art. L0636048

Art. L0601331