




Water lubricated stern gear

G.R.P. (Polyester) stern tube assembly

Type	Ø D (mm)	Length (mm)	J (mm)	Ø Q (mm)	W (mm)	C (mm)	Length B (mm)			
BG25	25	500	40	44	112	127	581,5	1081,5	1581,5	2081,5
BG30	30	500	57	50	112	172	595,5	1095,5	1595,5	2095,5
BG35	35	500	54	57	112	184	595,5	1095,5	1595,5	2095,5
BG40	40	500	64	62	114	214	595,5	1095,5	1595,5	2095,5

- 1. Propeller shaft
- 2. Stern tube
- 3. Inner bearing

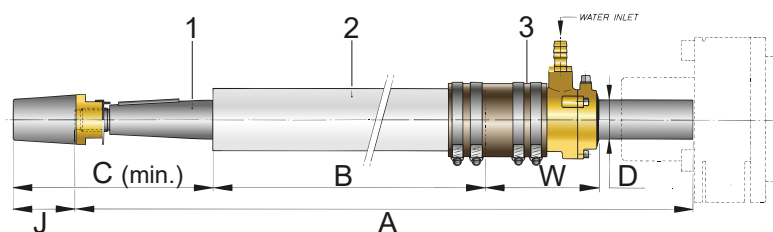

G.R.P. stern tubes - type BG

The propeller end of the G.R.P. stern tube is provided with an outer cutlass bearing. The stern tubes must be bonded directly into the hull.



Type	Ø D (mm)	Length B (mm)				K (mm)	Ø Q (mm)
BG25	25	581,5	1081,5	1581,5	2081,5	8	44
BG30	30	595,5	1095,5	1595,5	2095,5	10	50
BG35	35	595,5	1095,5	1595,5	2095,5	10	57
BG40	40	581,5	1081,5	1581,5	2081,5	12	62



Depending on the length, diameter and RPM of the shaft, there is a need for one, two or three cutlass bearings.

Forward bearing for stern tubes

Type	Description
BR225	Bearing for Ø 25 mm stern tube
BR230	Bearing for Ø 30 mm stern tube
BR235	Bearing for Ø 35 mm stern tube
BR240	Bearing for Ø 40 mm stern tube

Intermediate bearing for stern tubes

Type	Description
BR325	Bearing for Ø 25 mm stern tube
BR330	Bearing for Ø 30 mm stern tube
BR335	Bearing for Ø 35 mm stern tube
BR340	Bearing for Ø 40 mm stern tube