



Waterlock/Muffler

Designed for horizontal installation

The body of this waterlock / muffler consists of two rotatable chambers and fully rotatable hose connections, ensuring simple and time saving installation in a wide range of applications.


Type NLPH

Suitable for a wide range of applications

- Suitable for Ø 40, 45, 50, 60, 75 or 90 mm internal hose diameters
- Comes with two securing straps
- Exchangeable 65 mm hose connection (SET00025) can be ordered separately*




NLPH

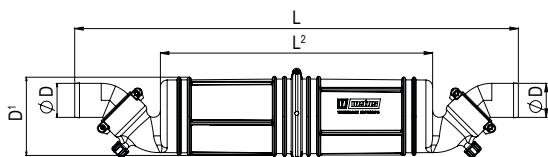

Type 40, 45, 50

| Type | Capacity (L) | Hose I.D. | | Ø D ¹ (mm) | L (mm) | L ² (mm) |
|----------------|--------------|-----------|----------|-----------------------|--------|---------------------|
| | | Ø D (mm) | Ø D (mm) | | | |
| NLPH40 | 3 | 40 | 110 | 110 | 652 | 400 |
| NLPH45 | 3 | 45 | 110 | 110 | 652 | 400 |
| NLPH50 | 3 | 50 | 110 | 110 | 652 | 400 |
| NLPH60* | 10 | 60 | 155 | 155 | 879 | 500 |
| NLPH75* | 10 | 75 | 155 | 155 | 879 | 500 |
| NLPH90* | 10 | 90 | 155 | 155 | 879 | 500 |

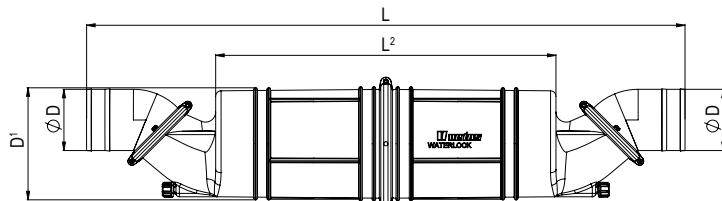

Type 60, 75, 90

Type NLP3

The quietest waterlock in the world!


Due to its unique three chamber technology it has a sound reduction of an incredible 10dB more than the traditional waterlocks. Its rotatable chambers and hose connections ensure a quick and simple installation even in the most confined spaces.

- Suitable for Ø 40, 45, 50, 60, 75 or 90 mm internal hose diameters
- Comes with two securing straps
- Exchangeable 65 mm hose connection (SET00025) can be ordered separately*




NLP3

| Type | Capacity (L) | Hose I.D. | | Ø D ¹ (mm) | L (mm) | L ² (mm) |
|-------------------|--------------|-----------|----------|-----------------------|--------|---------------------|
| | | Ø D (mm) | Ø D (mm) | | | |
| NLP340 | 5 | 40 | 110 | 110 | 772 | 520 |
| NLP345 | 5 | 45 | 110 | 110 | 772 | 520 |
| NLP350 | 5 | 50 | 110 | 110 | 772 | 520 |
| NLP360* | 10 | 60 | 155 | 155 | 1050 | 670 |
| NLP375* | 10 | 75 | 155 | 155 | 1050 | 670 |
| NLP390* | 10 | 90 | 155 | 155 | 1050 | 670 |
| NLP36015L* | 15 | 60 | 155 | 155 | 1200 | 825 |
| NLP37515L* | 15 | 75 | 155 | 155 | 1200 | 825 |
| NLP39015L* | 15 | 90 | 155 | 155 | 1200 | 825 |

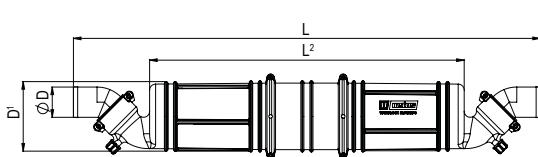

Type 40, 45, 50

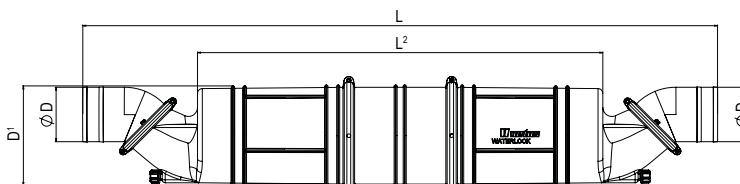

Type 60, 75, 90