

Exhaust systems

Waterlocks specifically for larger boats


Excellent sound reduction, minimal back pressure

This type of waterlock is designed for modern high-performance boats with one or two large engines which have little space to spare in the engine room. The outlet connection at the top can rotate through 360° and the inlet connection is at an angle of 45° upward. Type MG can only be installed in water injected exhaust systems. Its body is entirely made of synthetic materials, therefore not susceptible to corrosion or galvanic action.

Type MG

Specifications

- Excellent sound reduction
- Minimal back pressure
- Drain valve for winter storage
- Suitable for Ø 90, 102, 127, 152, 209 or 250 mm internal hose diameters
- Capacities of 23, 75 or 130 L
- Drain thread size M12
- Temperature sensor is optional

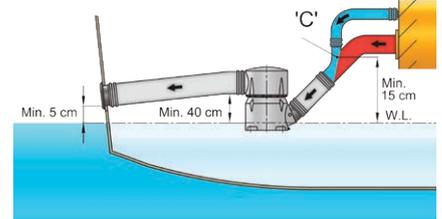

MGP

| Type | Capacity (L) | Hose I.D. | | Ø D ² (mm) | H (mm) | C-C (mm) | C-C' (mm) |
|-----------|--------------|-----------|-----------------------|-----------------------|--------|----------|-----------|
| | | Ø D (mm) | Ø D ¹ (mm) | | | | |
| MGP9090 | 23 | 90 | 90 | 270 | 450 | 213,5 | 213,5 |
| MGP102102 | 23 | 102 | 102 | 270 | 450 | 213,5 | 213,5 |
| MGP5455 | 23 | 127 | 127 | 270 | 450 | 213,5 | 213,5 |
| MGP102127 | 23 | 102 | 127 | 270 | 450 | 213,5 | 213,5 |




MGS

| Type | Capacity (L) | Hose I.D. | | Ø D ² (mm) | H (mm) | C-C (mm) | C-C' (mm) |
|----------|--------------|-----------|-----------------------|-----------------------|--------|----------|-----------|
| | | Ø D (mm) | Ø D ¹ (mm) | | | | |
| MGS5455A | 75 | 127 | 127 | 400 | 700 | 213,5 | 213,5 |
| MGS5456A | 75 | 127 | 152 | 400 | 700 | 213,5 | 213,5 |
| MGS6456A | 75 | 152 | 152 | 400 | 700 | 213,5 | 213,5 |



MGL

| Type | Capacity (L) | Hose I.D. | | Ø D ² (mm) | H (mm) | C-C (mm) | C-C' (mm) |
|-----------|--------------|-----------|-----------------------|-----------------------|--------|----------|-----------|
| | | Ø D (mm) | Ø D ¹ (mm) | | | | |
| MGL6458A | 130 | 152 | 203 | 500 | 750 | 382 | 382 |
| MGL8458A | 130 | 203 | 203 | 500 | 750 | 382 | 382 |
| MGL84510A | 130 | 203 | 250 | 500 | 750 | 382 | 382 |

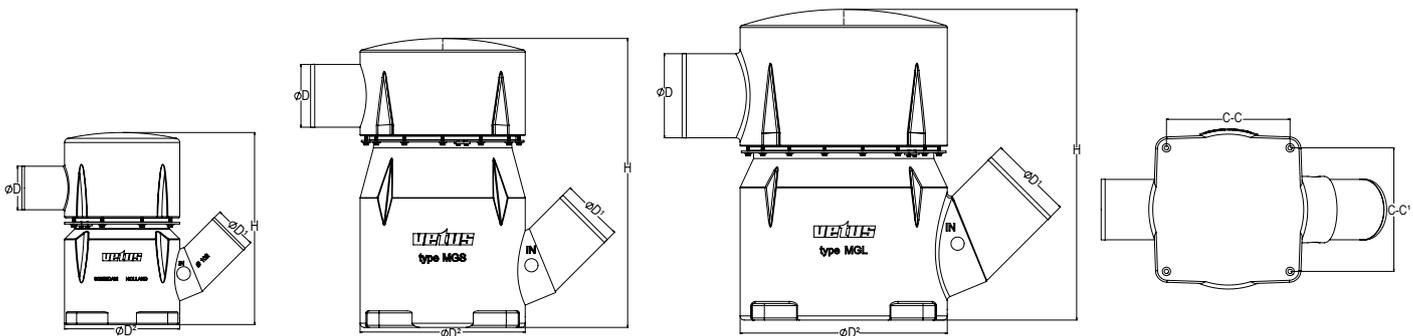

Note: For a minimum order of ten pieces, we can supply these waterlocks with inlet or outlet connection at an angle of 0° or 15°.

To optimise the sound reduction, flexible mounts for the waterlocks MG and HPW can be used. Please see page 131 for more information.

