

Waterlocks specifically for commercial boats (Heavy Duty Line)

NLPHD



Specifications

- Suitable for Ø 40, 45, 50, 60, 65, 75 and 90 mm internal hose diameters
- Special composite blend (NAVIDURIN®) is capable of handling temperatures up to 260 °C
- 360° Rotating bodies and hose connections (infinite connection possibilities)
- Comes with mounting brackets for bulkhead and floor mounts



NLPHD


Type	Capacity (L)	Hose I.D.		L (mm)	H (mm)	H' (mm)	Ø C-C (mm)	Ø C-C' (mm)	Ø C-C² (mm)
		Ø D (mm)	Ø D¹ (mm)						
NLP40HD	4,5	40	165	385	254	220	50,5	186	79
NLP45HD	4,5	45	165	385	254	220	50,5	186	79
NLP50HD	4,5	50	165	385	254	220	50,5	186	79
NLP50SHD	10	50	210	515	362	320	75,5	240	79
NLP60HD	10	60	210	515	362	320	75,5	240	79
NLP65HD	10	65	210	515	362	320	75,5	240	79
NLP75HD	10	75	210	515	362	320	75,5	240	79
NLP90HD	10	90	210	515	362	320	75,5	240	79

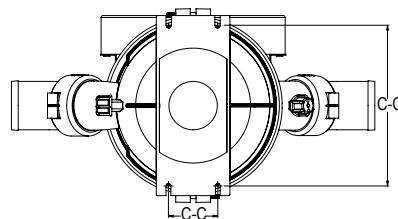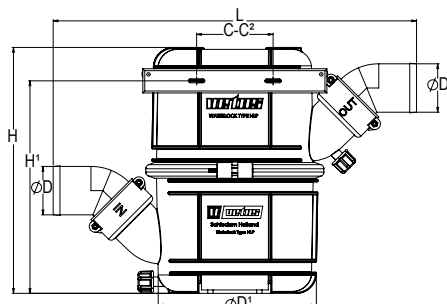

HPW

Specifications

- Suitable for Ø 102, 127 and 152 mm internal hose diameters
- Special composite blend (NAVIDURIN®) is capable of handling temperatures up to 260 °C
- High capacity waterlift design providing complete security for your engine
- Excellent sound attenuation with minimal back pressure
- Rotating body and hose connections for easy installation
- With integrated mounting plate
- HPW is equipped with 2 drains of G 1/4 internal thread to simplify access with twin engine installation
- Temperature sensor is optional

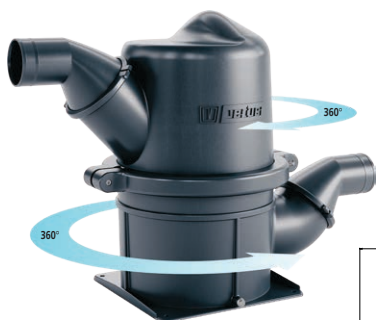

HPW

Type	Capacity (L)	Hose I.D.		L (mm)	W (mm)	H (mm)	Ø C-C (mm)	Ø C-C' (mm)
		Ø D (mm)	Ø D¹ (mm)					
HPW102	55	102	102	950	380	648	330	330
HPW127	55	127	127	950	380	648	330	330
HPW152	55	152	152	950	380	648	330	330
HPW127152	55	127	152	950	380	648	330	330

