

Exhaust systems

Muffler

Type DEMPMP

Better noise reduction



The construction of this muffler causes almost no resistance to the free flow of the exhaust gases. It creates additional mixing of the water inside the exhaust line which results in even better noise reduction.

- Suitable for Ø 40, 45, 50, 60, 75, 90 or 102 mm internal hose diameters



DEMPMP

Type	Hose I.D. Ø D (mm)	L (mm)	L' (mm)	W (mm)	H (mm)
DEMPMP40	40	368	240	158	108
DEMPMP45	45	368	240	158	108
DEMPMP50	50	368	240	158	108
DEMPMP60	60	368	240	158	108
DEMPMP75	75	456	320	180	130
DEMPMP90	90	456	320	180	130
DEMPMP100	102	580	380	202	168

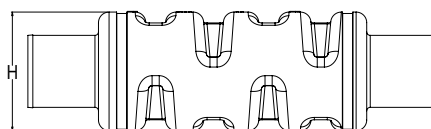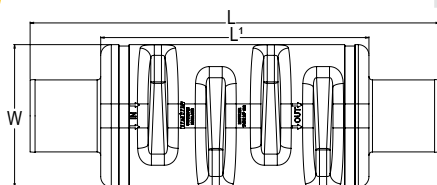

Muffler and gooseneck

Type NLPG

Perfect combination of a muffler and gooseneck


Combining the functions of a muffler and gooseneck saves installation time and space while maintaining the essential qualities of a good exhaust system with impressive negligible back pressure. The gooseneck prevents water back filling the exhaust and the muffler creates additional water mixing to further reduce the exhaust noise.

Specifications

- Suitable for Ø 40, 45, 50, 60, 75 or 90 mm internal hose diameters
- Fully rotatable sections and hose connections to ensure easy installation
- Comes with a hose barb to connect the air vent
- Comes with two securing straps
- Exchangeable 65 mm hose connection (SET00025) can be ordered separately*



NLPG

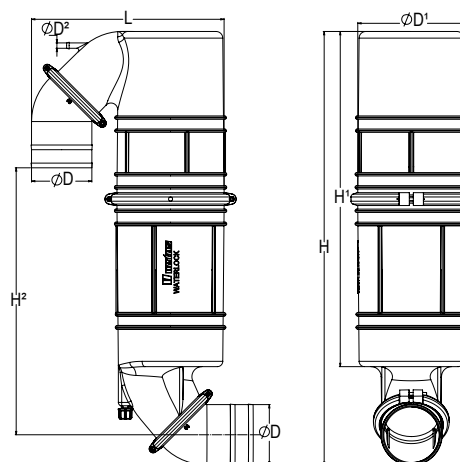

Type	Capacity (L)	Hose I.D. Ø D (mm)	Ø D¹ (mm)	Vent Ø D² (mm)	L (mm)	H (mm)	H¹ (mm)	H² (mm)
NLPG40	3	40	110	8	205	494	385	400
NLPG45	3	45	110	8	205	494	385	400
NLPG50	3	50	110	8	205	494	385	400
NLPG60*	10	60	160	8	285,3	646,4	405	500
NLPG75*	10	75	160	8	285,3	646,4	405	500
NLPG90*	10	90	160	8	285,3	646,4	405	500