

Fresh water systems

Accessories

Inspection lid type WTK02

For (waste) water tanks only!

Without counter flange.

Specifications

- Overall diameter Ø 156 mm
- Cut out diameter Ø 115 mm
- Not suitable for fuel tanks
- Ideal for metal tanks



WTK02

Type	Description
WTK02	Inspection lid only, for rigid fresh water tanks
ILT120PL / ILT120PH	See page 187 for inspection port ILT120PL / ILT120PH

Inspection lid kit type WTIKIT

Complete with gasket, counter flange and fastenings

Specifications

- Overall diameter Ø 156 mm
- Cut out diameter Ø 115 mm
- Not suitable for fuel tanks



WTIKIT


Type	Description
WTIKIT	Inspection lid for rigid fresh water tanks
ILT120PL / ILT120PH	See page 187 for inspection port ILT120PL / ILT120PH

Installation kit type WTKIT

With inspection lid and angled connectors

The installation kit consists of

1. One inspection lid (WTIKIT)
2. One right angle connector (RT38B) for filling hose Ø 38 mm
3. One right angle connector (RT16B) for water pump Ø 16 mm
4. One right angle connector (RT16B) for ventilation Ø 16 mm
5. Two lashing straps
6. T-piece for interconnecting two tanks Ø 16 mm

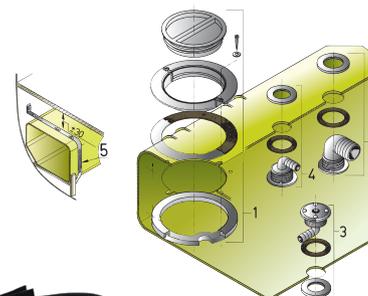

WTKIT

Type	Description
WTKIT	Installation kit for fresh water tanks