



Electric marine toilets

Comfort, efficiency and compact installation for every vessel

VETUS electric toilets combine hygiene, durability and convenience in a compact design. Whether you're upgrading from a manual pump toilet or outfitting a new yacht, there's a model to fit your space, voltage, and comfort requirements. All models are designed for quiet operation, low power consumption and a low water consumption.

Each toilet comes with a powerful macerator pump with stainless steel cutting blades, and a soft-close seat for optimal on-board sanitation. Options are available for both floor and wall mounting, compact or full-size bowls.

Toilet model comparison table


Type	Mounting	Size	Control type	Voltage	Special features	Noise level (dBA)	Weight (kg)
TMSQ	Floor mount	Compact	Switch or control panel	12 V / 24 V DC	Includes Ø19/25/38 mm adapters	± 60	20
TMWQ	Floor mount	Compact	Switch or control panel	12 V / 24 V DC	Includes Ø19/25/38 mm adapters	± 60	18
SMTQ	Floor mount	Extra compact	Control panel	12 V / 24 V DC	Lightweight and small footprint	± 60	17,5
SMTOS	Floor mount	Extra compact	Switch	12 V / 24 V DC	Lightweight and small footprint	± 60	17,5
WCP	Floor mount	Extra compact	Control panel	12 V / 24 V DC	External control box	± 60	17,5
WCPS	Floor mount	Extra compact	Switch	12 V / 24 V DC	Lightweight and small footprint	± 60	17,5
WCS	Floor mount	Full-size	Control panel or push button	12 V / 24 V DC / 110/230 V AC	Home-style design, comfortable seat height	± 60	23
HATO	Wall mount	Regular	Control panel or push button	12 V / 24 V DC / 230 V AC	No floor contact, sleek design	± 60	38

TMSQ / TMWQ - Compact floor mounted electric toilet


Specifications

- A welcome alternative for manual pump toilets
- Compact size
- Floor mount
- Quiet macerator operation
- Soft-close and quick-release toilet seat
- Includes adapters for Ø 19, Ø 25 and Ø 38 mm discharge hose
- Control via rocker switch or control panel
- Available in 12 V or 24 V DC
- Low water consumption

Type	Control type	Voltage (V DC)	Consumption (A)	External Ø discharge (mm)	Water inlet connection	Noise level (dBA)	Weight (kg)
TMW12Q	Switch or control panel	12	25	Includes Ø19/25/38 mm adapters	Female G ³ / ₄ / 13 mm	± 60	18
TMW24Q	Switch or control panel	24	12,5	Includes Ø 19/25/38 mm adapters	Female G ³ / ₄ / 13 mm	± 60	18
TMS12Q	Switch or control panel	12	25	Includes Ø 19/25/38 mm adapters	Female G ³ / ₄ / 13 mm	± 60	20
TMS24Q	Switch or control panel	24	12,5	Includes Ø 19/25/38 mm adapters	Female G ³ / ₄ / 13 mm	± 60	20

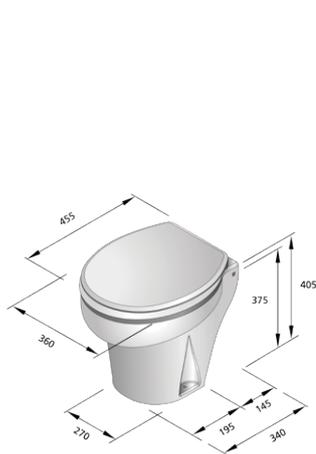

TMSQ



TMWQ

