

Tasman winch, reel in true adventure

SPECIFICATIONS

MODEL	6-6	6-4	8-8	8-6
Electric motor	DC	DC	DC	DC
Motor power	600 W	600 W	1000 W	1000 W
Voltage (DC)	12 or 24 VDC	12 or 24 VDC	12, 24 or 48 VDC	12, 24 or 48 VDC
Max Pulling force				
- 1 layer on drum	700 kg 1540 lbs	700 kg 1540 lbs	1000 kg 2200 lbs	1000 kg 2200 lbs
- Full drum	100 kg 220 lbs	100 kg 220 lbs	350 kg 770 lbs	350 kg 770 lbs
Haulage Speed				
- 1 layer on drum	7.5 m/min 25 ft/min	7.5 m/min 25 ft/min	13 m/min 43 ft/min	13 m/min 43 ft/min
- Full drum	50 m/min 164 ft/min	50 m/min 164 ft/min	60 m/min 196 ft/min	60 m/min 196 ft/min
Rope size	6 mm MAX warp x 70 m	4 mm UHM- WPE x 100 m + 6 mm MAX warp x 10 m	8 mm MAX warp x 100 m	6 mm MAX warp x 150 m
Chain size	6 mm Short Link DIN766 x 10 m	6 mm Short Link DIN766 x 10 m	8 mm Short Link DIN766 x 10 m	6 mm Short Link DIN766 x 10 m
Net weight (incl. rope/chain)	24 kg 53 lbs	24 kg 53 lbs	37 kg 81 lbs	31 kg 68 lbs

DIMENSIONS


MODEL	TASMAN 6		TASMAN 8	
	mm	inch	mm	inch
A	200	7 7/8	300	11 3/4
B	180	7 1/16	200	7 7/8
C	210	8 1/4	310	12 1/4
D	155	6 1/16	165	6 1/2
E	209	8 1/4	229	9
F	259	10 3/16	280	11

STANDARD EQUIPMENT REQUIRED FOR DUAL DIRECTION CONTROL

Dual Direction Solenoid (included)
 Up/Down remote control panel (included)
 Circuit breaker/isolator panel (included)

OPTIONS

1. AutoAnchor™ Equipment
2. Foot Switches
3. Compact Remote
4. Roving remote

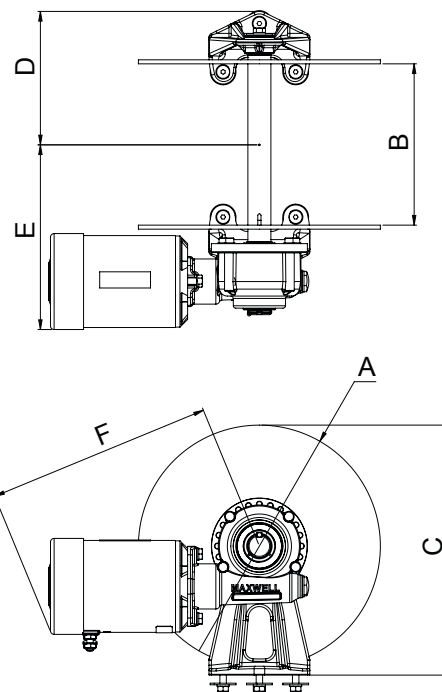

Tasman-8 V2

