


## Deck equipment



SLT3PA



SLT4PA

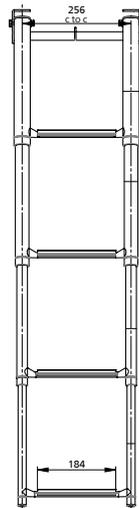

### Ladder, telescopic platform


Stainless steel (AISI 316). Available with three or four steps. With synthetic black grips.

Type	Steps	L (extended) (mm)	L (retracted) (mm)	Width (c to c)* (mm)	Tube Ø (mm)	Weight (kg)	Max. load (kg)
SLT3PA	3	875	370	256	19/25/32	3,6	300
SLT4PA	4	1165	405	256	19/25/32/38	5,1	300

\* c to c means distance between tube centers



SLT4CA

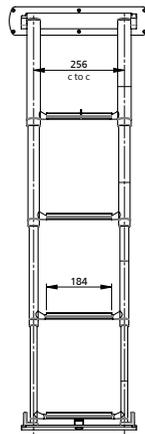

### Ladder, telescopic cassette

High gloss polished stainless steel (AISI 316). Available with four steps. With black synthetic grips.

Type	Steps	L (extended) (mm)	L (retracted) (mm)	Width (c to c)* (mm)	Tube Ø (mm)	Weight (kg)	Max. load (kg)
SLT4CA	4	1160	0	256	19/25/32/38	8,0	300


\* c to c means distance between tube centers



SLFB3A



SLFB4A



### Ladder, folding, deck mounted

Stainless steel (AISI 316). Available with three or four steps with synthetic black grips.

Type	Steps	L (extended) (mm)	L (retracted) (mm)	Width (c to c)* (mm)	Tube Ø (mm)	Weight (kg)	Max. load (kg)
SLFB3A	3	685	375	228	22	1,8	175
SLFB4A	4	920	550	228	22	2,3	175

\* c to c means distance between tube centers

