


Deck equipment



PIJP

STEUN..

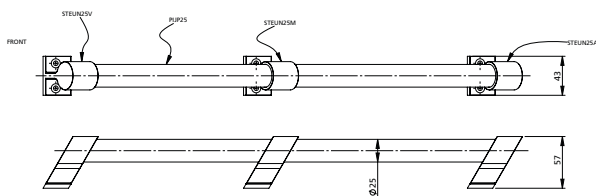

Handrail, stainless steel (AISI 316)

Rail pipe and rail support available in Ø 20 mm and Ø 25 mm. Pipe is available per metre. Supports must be ordered separately, please see price list.

Type	Tube Ø (mm)	Wall thickness (mm)	Max. pipe length (mm)
PIJP	20	1,5	6000
PIJP25	25	1,5	6000

Type	Tube Ø (mm)	Support
STEUN20V	20	Front
STEUN20A	20	Rear
STEUN20M	20	Middle
STEUN25V	25	Front
STEUN25A	25	Rear
STEUN25M	25	Middle

Stanchions, stainless steel (AISI 316)


Tapered with two wire holes. Max. railing wire 9,5 mm.

Supplied without the sockets.

Type	Length (mm)	Height (mm)	C - C (mm)	D1 (mm)	D2 (mm)	D3 (mm)	Hole spacing
STANCH61	619	610	305	10,1	10,1	8	2 wire holes at 305 / 610
STANCH75	759	750	360	10,1	10,1	8	2 wire holes at 360 / 750

Suitable for STANCHPR + STANCHPS

STANCH..

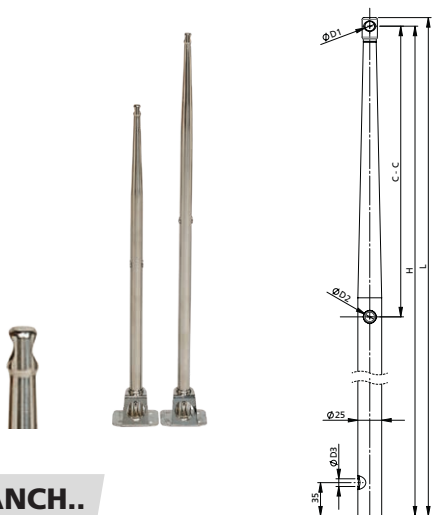

Stanchion sockets, stainless steel (AISI 316)

Specifications


- Diameter: 25 mm
- 90° straight or with 6° angle

Type	Description
STANCHPR	Straight
STANCHPS	Angled

Suitable for STANCH61 + STANCH75



STANCHPR



STANCHPS

