


Marine fittings, stainless steel (AISI 316)

V-Equipment marine fittings are designed for reliability and made of high grade materials. Failure of submerged fittings can cause major problems, therefore we advise the use of stainless steel (AISI 316) or bronze fittings (ISO CuPb5Sn5Zn5) for applications in which the fittings are in continuous contact with salt water.


Water scoop

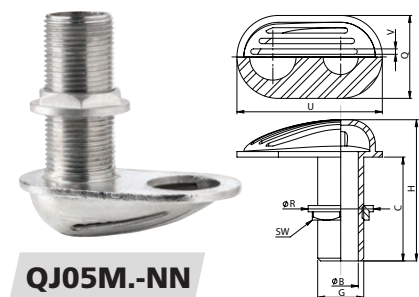

Type	Thread (G)*	ØB (mm)	H (mm)	C (mm)	Q (mm)	ØR (mm)	SW (mm)	U (mm)	V (mm)	Weight (kg)
QJ05MC-NN	3/8"	11	90	66	44	26	22	81	2,5	0,2
QJ05MD-NN	1/2"	12	88	65	44	32	25	81	2,5	0,3
QJ05ME-NN	3/4"	19	107	82	56	41	32	104	3	0,4
QJ05MF-NN	1"	26	105	76	60	47	38	106	3,2	0,5
QJ05MG-NN	1 1/4"	33	103	78	64	57	49	116	2,8	0,6
QJ05MH-NN	1 1/2"	39	108	82	70	72	53	133	2,5	0,7
QJ05MI-NN	2"	51	122	91	86	83	68	152	3.6	1

* According to ISO 228/1-G..B

Air vent

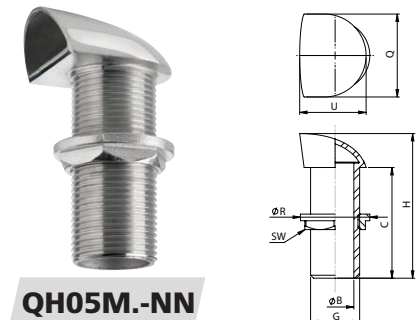


Polished surface, without flame arrester gauze.

Type	Thread (G)*	ØB (mm)	H (mm)	C (mm)	Q (mm)	ØR (mm)	SW (mm)	U (mm)	Weight (kg)
QH05MD-NN	1/2"	16	83	65	38	32	25	38	0,1
QH05ME-NN	3/4"	21	86	65	43	41	32	41	0,2
QH05MF-NN	1"	27	98	75	50	47	38	58	0,3
QH05MG-NN	1 1/4"	36	108	79	57	57	49	65	0,4
QH05MH-NN	1 1/2"	42	114	82	64	72	53	75	0,5
QH05MI-NN	2"	53	134	89	81	83	68	97	1


* According to ISO 228/1-G..B

Hose connector

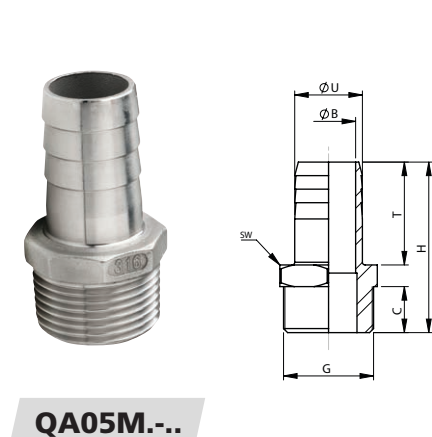

Type	Thread (G)	ØU (mm)	ØB (mm)	H (mm)	C (mm)	T (mm)	Weight (kg)
QA05MC-15	3/8"	15	9	45	12,5	25	0,03
QA05MD-12	1/2"	12	9	50	16	26	0,04
QA05MD-15	1/2"	15	11	54	14,5	31	0,04
QA05MD-20	1/2"	20	14	58	15	32	0,06
QA05ME-20	3/4"	20	15,5	56	17	31	0,07
QA05ME-25	3/4"	25	20	63	17	37	0,09
QA05MF-25	1"	25	20,5	67	19	39,5	0,12
QA05MF-30	1"	30	25	70	19	43	0,14
QA05MG-32	1 1/4"	32	27	76	21	45	0,17
QA05MG-35	1 1/4"	35	29,5	76	20,5	45	0,20
QA05MG-38	1 1/4"	38	30	75	20,5	45	0,20
QA05MH-38	1 1/2"	38	33,5	81,5	22	48	0,25
QA05MH-45	1 1/2"	45	39	86	22	52,5	0,25
QA05MI-50	2"	50	44	98,6	26	59,5	0,41

Hose connector

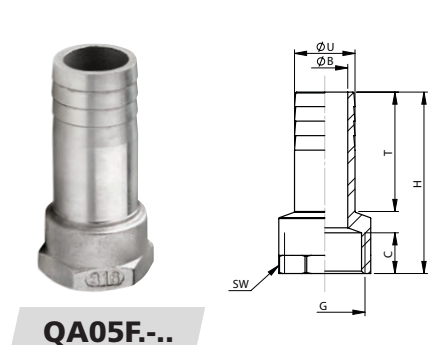

Type	Thread (G)*	ØU (mm)	ØB (mm)	H (mm)	C (mm)	T (mm)	Weight (kg)
QA05FC-15	3/8"	15	10	41	11,5	26,5	0,04
QA05FD-15	1/2"	15	10	48	15,5	27	0,06
QA05FD-20	1/2"	20	15	48	15,5	30	0,06
QA05FE-20	3/4"	20	14	56	16	34	0,09
QA05FF-25	1"	25	18,5	63	19	37,5	0,14
QA05FG-35	1 1/4"	35	28	69	21	42	0,3
QA05FG-40	1 1/4"	40	34	69	21	42	0,3
QA05FH-45	1 1/2"	45	38	76	21,5	50	0,4
QA05FI-50	2"	50	42	90,5	24	59,5	0,5

* According to ISO 228/1-G..