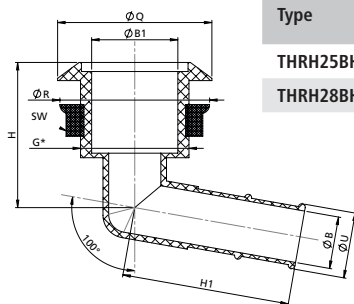


Marine fittings, Delrin

Thru-hull - Chamfered


100° angled


THR..BH


Type	Thread (G)	ØU (mm)	ØB (mm)	ØB1 (mm)	H (mm)	H1 (mm)	ØQ (mm)	ØR (mm)	SW (mm)	Weight (kg)
THR25BH	1½"	25	20	38	64	74	68	66	56	0,094
THR28BH	1½"	28	20	38	64	74	68	66	56	0,094

Thru-hull - Flush

100° angled

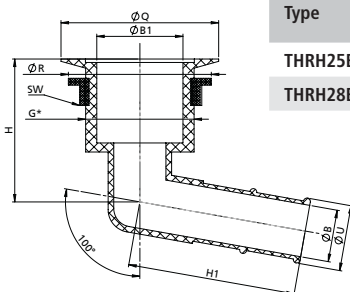
THR..BL



Type	Thread (G)	ØU (mm)	ØB (mm)	ØB1 (mm)	H (mm)	H1 (mm)	ØQ (mm)	ØR (mm)	SW (mm)	Weight (kg)
THR25BL	1½"	25	20	38	63	74	69,5	63	53	0,090
THR28BL	1½"	28	20	38	63	74	69,5	63	53	0,090

Bulkhead connectors



BULKH..

Type	Model A / B	Thread (G)	ØU (mm)	ØB (mm)	ØB1 (mm)	H (mm)	ØQ (mm)	ØR (mm)	SW (mm)	T (mm)	T1 (mm)	Weight (kg)
BULKH16	B	¾"	16	8	9,5	110	50	-	34	29	32	0,040
BULKH19	A	¾"	19	11	13	113	50	40	34	29	32	0,040
BULKH25	A	1¼"	25	19	19	166	68	66	57	49	32	0,108
BULKH28	B	1¼"	28	22	22	175	68	66	57	49	32	0,114
BULKH32	A	1¼"	32	25	25	166	68	68	57	49	32	0,116
BULKH38	A	1½"	38	31	32	162	68	63	53	46	32	0,144


Model 'A'



Model 'B'



T-Piece


TPC..


Synthetic equal T-piece. Suitable for temperatures up to +83 °C.

Type	ØU (mm)	ØB (mm)	H (mm)	H1 (mm)	L (mm)	T (mm)	Weight (kg)
TPC16	16	10,5	39	40	84	26	0,016
TPC19	19	14	39	40	84	26	0,016
TPC25	25	17	54	52	99	32	0,034
TPC28	28	21	54	52	99	32	0,032