

Marine fittings



CAP.38S



CAP.51S

Deck entries, stainless steel (AISI 316)

These stainless steel (AISI 316) deck entries are also available with a winch handle socket (item codes ending with a 'W'). With high-gloss polished watertight cover.

Cover inscriptions:

- Water
- Unleaded gasoline
- Diesel fuel
- 'Pump-out' icon (WC)




CAPWC38S



CAP..W



KEY1

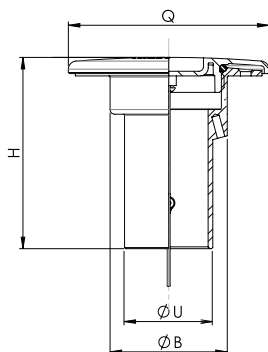


Type	Cap (Q) Ø (mm)	Type	Liquid	Hose (U) Ø (mm)	Cut-out (B) Ø (mm)	Length (H) (mm)
CAPW38S	86,5	Slotted	Water	38	51	82,5
CAPW38W	86,5	Winch	Water	38	51	82,5
CAPG38S	86,5	Slotted	Unleaded Gasoline	38	51	82,5
CAPG38W	86,5	Winch	Unleaded Gasoline	38	51	82,5
CAPF38S	86,5	Slotted	Diesel fuel	38	51	82,5
CAPF38W	86,5	Winch	Diesel fuel	38	51	82,5
CAPWC38S*	86,5	Slotted	WC (pump out)	38	51	126,5
CAPWC38W*	86,5	Winch	WC (pump out)	38	51	126,5
CAPF51S	92,5	Slotted	Diesel fuel	51	57	82,5
CAPF51W	92,5	Winch	Diesel fuel	51	57	82,5

* Fullfills the requirements of ISO 8099:2001

Deck entry key

Key for slotted deck entries. Also suitable for deck entries with an octagonal recess.



Deck entries, chromium plated brass



FCAPDF38



FCAPDF50

Type	Cap Ø (mm)	Type	Liquid	Hose Ø (mm)	Cut-out Ø (mm)	Length (mm)
FCAPDF38	85	Ring	Diesel fuel	38	57	80
FCAPDF50	85	Ring	Diesel fuel	50	57	80
CAPWC38*	88	Pop-out	Waste (pump out)	38	50	115
FCAPWATER	85	Ring	Water	38	57	80

* Fullfills the requirements of ISO 8099:2001



CAPWC38



FCAPWATER