

Around the engine


Cooling water strainers

Type FTR1900

This type has two different threaded connection diameters and comes with adjustable stainless steel (AISI 304) mounting brackets for bulkhead installation. Hose connectors are not supplied as standard. They can be found on page 432 of this catalogue.

Specifications

- Housing is made of Polypropylene
- Stainless steel (AISI 316) filter element
- Acrylic cover

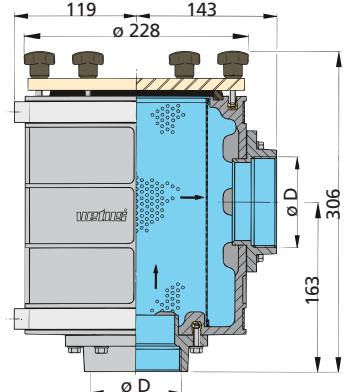

FTR1900

Type FTR330..M


The filter housing is made of NAVIDURIN® and features 19, 25, 32 or 38 mm hose connections. The metal lid allows easy inspection of the filter without removal. The FTR330..M series is tested up to a maximum of 8 bar overpressure, which means these filters are safe to place below the waterline!



Specifications

- NAVIDURIN® material Lloyd's approved!
- Easy inspection without dismantling
- New easily removable metal cover
- Robust and durable filter
- Can be mounted below the waterline

Type	Internal hose Ø (mm)	Internal hose Ø (inches)	Recommended input (L/min.)
FTR33019M	19	1 3/4	51
FTR33025M	25	1	91
FTR33032M	32	1 1/4	143
FTR33038M	38	1 1/2	200

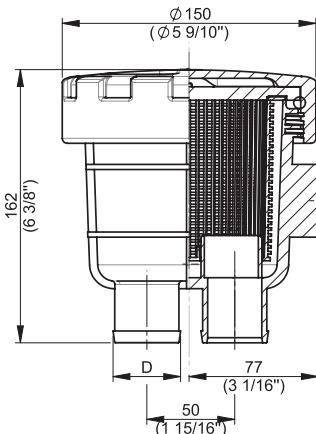

FTR330..M

