


Marine fittings, stainless steel (AISI 316)

Breather nipples

The breathing capacity fulfils the CE requirements. Provided with an easily cleaned stainless steel (AISI 316) gauze, which functions as a flame arrester.

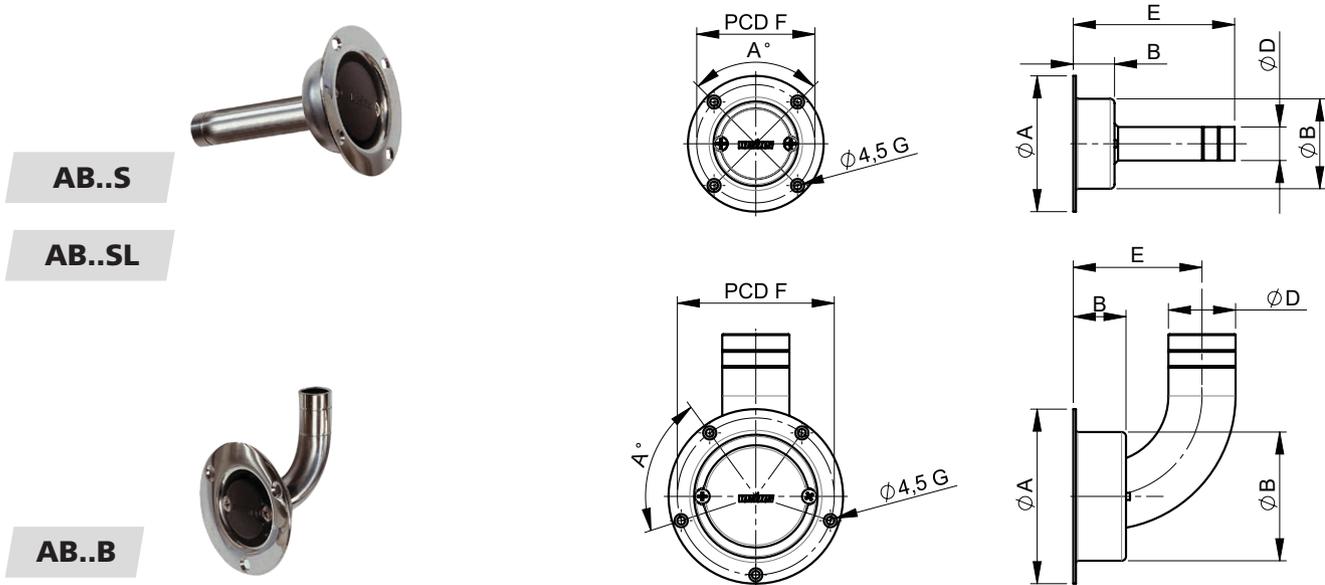

| Type | Shape | Material | ØD (mm) | ØA (mm) | PCD F (mm) | A° (mm) | # G | Cut-out Ø (mm) | ØB (mm) | Max. wall thickness (mm) | B (mm) | E (mm) |
|--------|----------|----------|---------|---------|------------|---------|-----|----------------|---------|--------------------------|--------|--------|
| AB16S | Straight | AISI 316 | 16 | 64 | 54 | 120 | 3 | 39,5 | 38 | N/A | 18 | 48 |
| AB16B | Angled | AISI 316 | 16 | 64 | 54 | 120 | 3 | 39,5 | 38 | 30 | 18 | 47 |
| AB19S | Straight | AISI 316 | 19 | 77 | 67 | 90 | 4 | 54 | 51 | N/A | 23,4 | 53,4 |
| AB19SL | Straight | AISI 316 | 19 | 77 | 67 | 90 | 4 | 54 | 51 | N/A | 23,4 | 91,5 |
| AB19B | Angled | AISI 316 | 19 | 77 | 67 | 90 | 4 | 54 | 51 | 31 | 23,4 | 53 |
| AB25B | Angled | AISI 316 | 25 | 77 | 67 | 90 | 4 | 54 | 51 | 31 | 23,4 | 53 |
| AB38B | Angled | AISI 316 | 38 | 99 | 89 | 72 | 5 | 76 | 73 | 42 | 29,9 | 73 |



Air vent nipples for tanks

Suitable for Ø 16 mm internal diameter hose. Straight or 90° angled. Provided with a gauze, which functions as a flame arrester.

| Type | Shape | Material | Hose Ø (mm) | Cut-out Ø (mm) | Wall thickness (mm) |
|--------|----------|----------|-------------|----------------|---------------------|
| ST04HS | Angled | AISI 316 | 16 | 20 | 0 - 10 |
| ST04S | Straight | AISI 316 | 16 | 20 | 0 - 10 |
| ST05HS | Angled | AISI 316 | 16 | 35 | 10 - 30 |
| ST05S | Straight | AISI 316 | 16 | 35 | 10 - 30 |